


F56C1.5M2A

C-Face General Purpose Hostile Duty Motor

Roller Steel Construction - Three Phase - TEFC - AC Motor

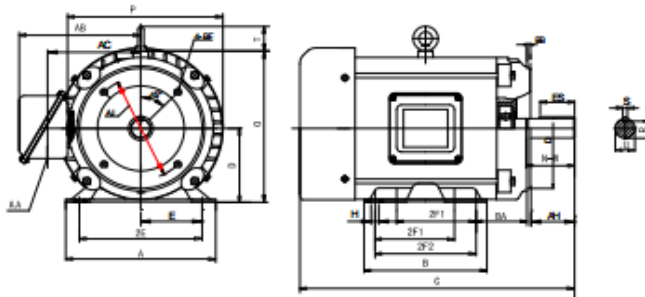

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	AC	P	O	BC	AH	AB	AA
E	2F1	2F2	H	BA	6.3	3.94	13.9	3.5	NA	4.9	6.9	7.0	.19	2.16	6.5	1.1
KEY					KEYSET R			FLANGE					SHAFT EXTENSION			
WIDTH		LENGTH			AK	AJ	BF	BB	BD	N-W	U					
.188		1.41			4.5	5.875	3/8-16	0.16	6.5	1.88	0.625					

PERFORMANCE DATA

Three Phase - 60Hz - 208-230/460V - NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
1.5	3510	56C	K	78.0	77.2	76.7	74.0	72.5	65.8	2.3	250	220
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA	6203ZZ	6203ZZ	F	TEFC	1.15	29					
2.72	16.9											



ElectricalHelper

"Practical Straight Forward Electrical Wiring Solutions Since 1928."

For Fast Friendly Assistance
 Call Us 888.226.4917
 Hours 8:00AM - 5:00PM