


F56C1M4A

C-Face General Purpose Hostile Duty Motor

Rolled Steel Construction - Three Phase - TEFC - AC Motor

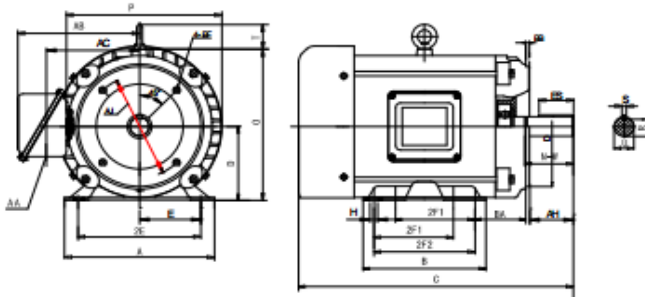

DIMENSIONS - INCHES

| MOUNTING | | | | | A | B | C | D | G | AC | P | O | BC | AH | AB | AA |
|----------|--------|-----|------|-------------|--------|-------|--------|------|-----|--------------------|-------|-----|-----|------|-----|-----|
| E | 2F1 | 2F2 | H | BA | | | | | | | | | | | | |
| 2.44 | 3 | NA | 0.34 | 2.75 | 6.3 | 3.94 | 12.6 | 3.5 | NA | 4.9 | 6.9 | 7.0 | .19 | 2.16 | 6.5 | 1.1 |
| KEY | | | | KEYSET R | FLANGE | | | | | SHAFT EXTENSION | | | | | | |
| WIDTH | LENGTH | | | | AK | AJ | BF | BB | BD | N-W | U | | | | | |
| .188 | 1.41 | | | 0.517 | 4.5 | 5.875 | 3/8-16 | 0.16 | 6.5 | 1.88 | 0.625 | | | | | |

PERFORMANCE DATA

Three Phase - 60Hz - 208-230/460V - NEMA Design B - Max. Ambient: 40° C

| HP | Speed | Frame | NEMA Code | Efficiency (%) | | | Power Factor | | | Torque (ft-lb) | | |
|--------------|-------|------------|-------------|------------------|----------------|----------------|--------------|------|------|----------------|------|------|
| | | | | 100% | 75% | 50% | 100% | 75% | 50% | FLT | BD1% | LRT% |
| 1 | 1760 | 56C | N | 71.0 | 70.7 | 69.3 | 74.0 | 73.2 | 71.5 | 3.05 | 488 | 320 |
| Amps (460V) | | DE Bearing | ODE Bearing | Insulation Class | Enclosure Type | Service Factor | Weight (lbs) | | | | | |
| FLA | LRA | | | | | | | | | | | |
| 2.26 | 14.1 | 6203ZZ | 6203ZZ | F | TEFC | 1.15 | 34 | | | | | |



ElectricalHelper

"Practical Straight Forward Electrical Wiring Solutions Since 1928."

For Fast Friendly Assistance
Call Us 888.226.4917
Hours 8:00AM - 5:00PM